

# DATASHEET

Splice Heat Shrink, transparent, length: 60mm, PU 100



## General data

Shrink splice protection to protect the splice from damage and environmental influences

**Storage in lockable box**

**Metal bolt for bend protection integrated**

Min. shrink temperature : 120°C

PPU: 100

## Available variants

| ArtNr.       | Bezeichnung                                           | Model                    |
|--------------|-------------------------------------------------------|--------------------------|
| 53100.9-100  | Splice Heat Shrink, transparent, length: 60mm, PU 100 | Thermo splice protection |
| 53100.91-100 | Splice Heat Shrink, transparent, length: 45mm, PU 100 | Thermo splice protection |


## Drawings

This datasheet was created automatically on 19-05-2023 . Technical changes reserved.



# DATASHEET

Splice Heat Shrink, transparent, length: 60mm, PU 100

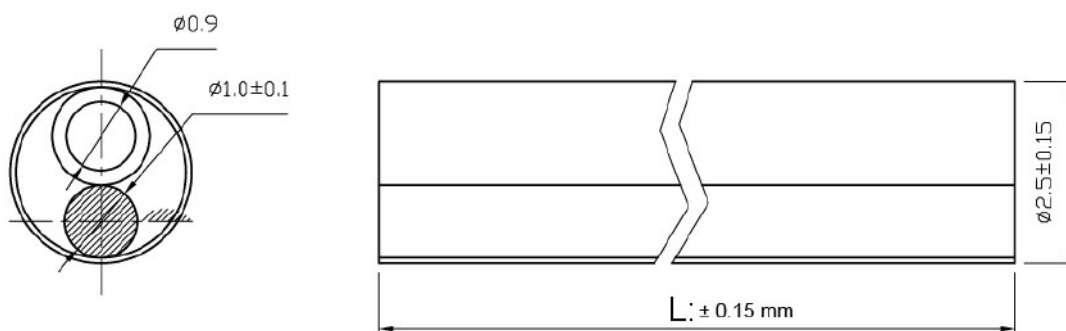

This datasheet was created automatically on 19-05-2023 . Technical changes reserved.